

Area of Application:
 Wall
 Water
 Min. working pressure 1 bar
 Max. working pressure 10 bar
 Min. temperature 5°C
 Max. temperature 80°C

Details:
 Check Valve
 Flowfix 7 L/min

45° Cup



Materials in media contact:

PA
 SS, AISI 316
 Rubber, EPDM
 POM
 TPE


Materials not in media contact: PP, PA, SEBS

Inlet / outlet connection:



Union Nut G1/2"
 Easy to Clean Spray Head(s)

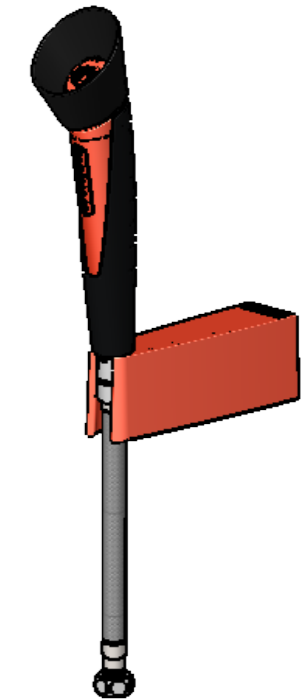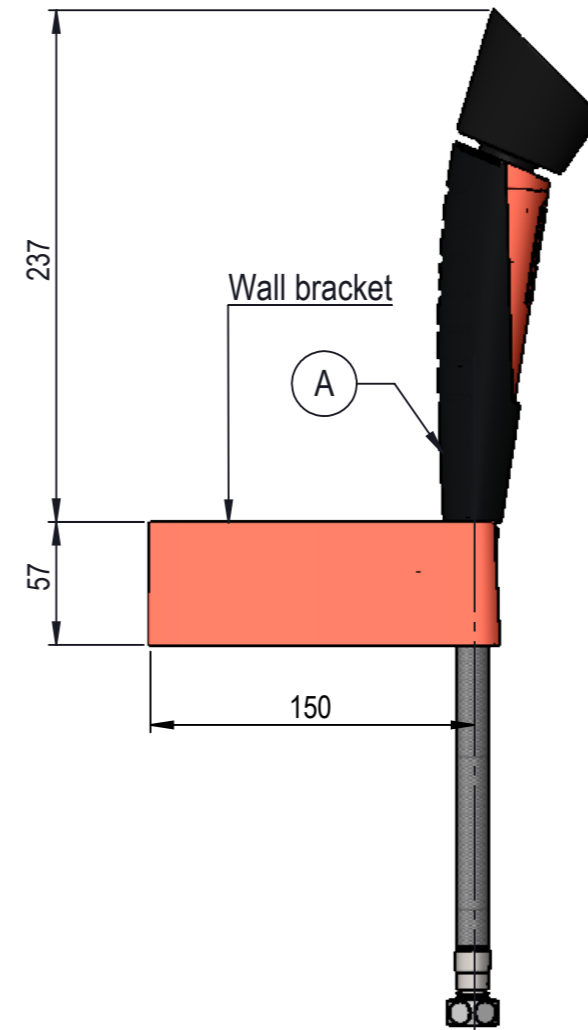

ISO 228/1- G-1/2 Union nut
 included gasket

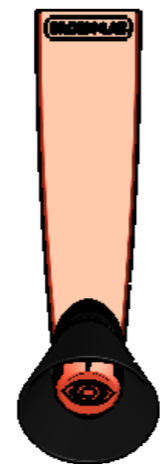

17001970
 Signs - instructions

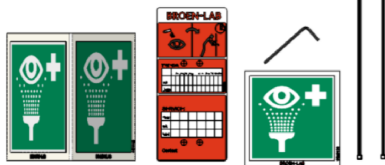

NOTE A: EN label 94G0122

Description: BROEN Emerg. Hand Eye Shower, Wall, 150mm, 45° Cup, .

						Media: Water					
						Comments:					
						Drawing type: Customer drawing					
						Weight: 0.328 Kg					
Rev.	Pos.	Date	TM No.	Design by	Drawn by:	Change:	Designed by: JAK	Drawn by: BJP	Released on TM No.	Date (DD-MM-YY): 22-06-18	
BROEN-LAB						This drawing is our property and cannot be given to a third party, copied or otherwise used without our permission. BROEN-LAB A/S.		Format: A3		Drawing No.: 27100031003011	