

2-module cabinet: soap + paper dispenser

mediclinics

EN

Complete cabinets

Ref. BTM13

Soap + Towel Paper

BTM13

Moisture-resistant MDF
wood

Matte black

OVERVIEW

- Hygiene cabinet designed to house soap and paper towel dispenser modules. Includes the modules.
- The front pictograms for soap and paper towels are backlit with LED lights. It also has backlighting at the bottom of the cabinet.
- Available in an air version instead of paper towels (model BTM12).
- The door is suspended, locks with a key, and features 2 pneumatic pistons that facilitate opening and closing.
- 2 Schuko-type sockets are available to connect the soap dispenser and a transformer for the LED lights (included). The entire electrical installation is included; only one power supply point is needed for all cabinet functions.
- Adjustable hardware and wall mounts included.


COMPONENTS AND MATERIALS

- **Automatic soap dispenser module DJ024BTM:** see corresponding technical data sheet.
- **Paper towel dispenser module DT024BTM:** see corresponding technical data sheet.

TECHNICAL DATA

Weight	41,50 kg
Pictogram light	<10 W
Cabinet backlight	<16 W

DIMENSIONS

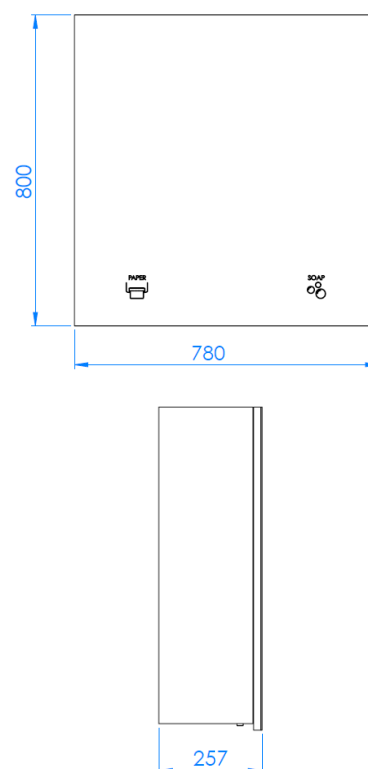

OPERATION

- **Automatic soap dispenser module DJ024BTM:** see corresponding technical data sheet.

Mediclinics S.A. reserves the right to make changes or modifications to the products and their specifications without prior notice.



www.mediclinics.com




REVISION:
04/26

2-module cabinet: soap + paper dispenser

GUIDE SPECIFICATION

Hygiene cabinet shall be composed of two elements: a paper towel dispenser and a sensor-operated soap dispenser. The cabinet shall weigh 41.50 kg. It shall be manufactured from water-resistant MDF with a matte black finish and a front mirror door with LED pictograms indicating each component. The soap dispenser shall have an infrared sensor at the bottom. The dispenser shall weigh 3.80 kg. It shall operate at a frequency of 50/60 Hz and a voltage of 220–240 V, or with 4x LR6 1.5 V batteries. The reservoir shall have a capacity of 1.50 L. The soap viscosity shall be 1–3,500 cps for gel and 1–20 cps for foam. The motion detection distance shall be adjustable with a magnet between 5–25 cm. It shall comply with the European Low Voltage Directive LVD 2014/35/EU (EN 60335-1, EN 61000-3-2, EN 61000-3-3). The paper towel dispenser shall be manual. The dispenser shall weigh 2.80 kg. The casing shall be made of AISI 304 stainless steel. Its capacity shall be 600Z-fold towels or 400 C-fold towels.

ASSEMBLY / RECOMMENDED INSTALLATION HEIGHTS

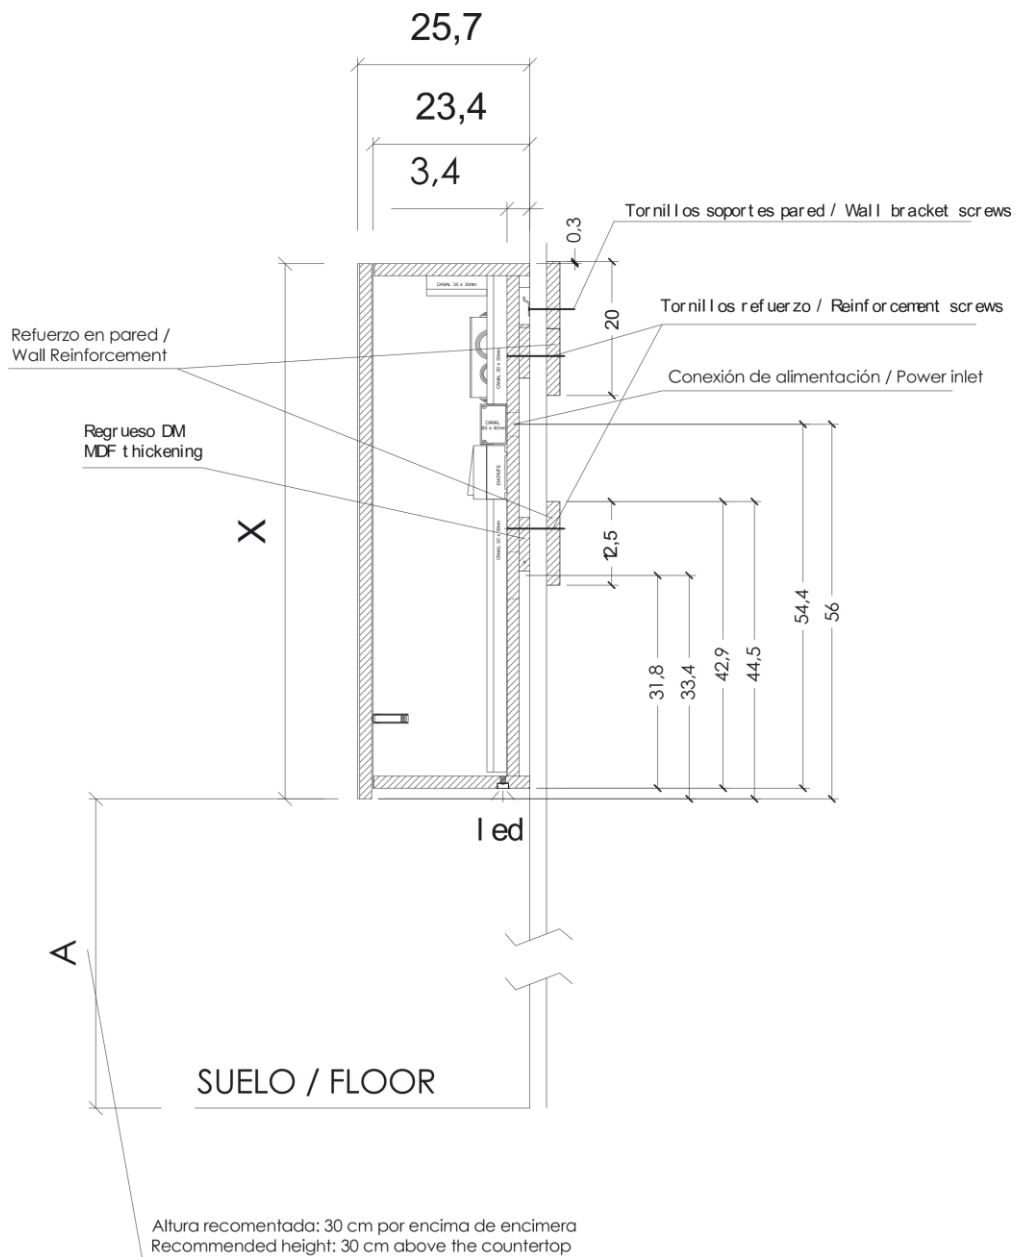

Mediclinics S.A reserves the right to make changes or modifications to the products and their specifications without prior notice.

